

smartCUE-zero-wifi

Wireless IP Interface



Description

Ultra-compact interface smartCUE-zero-wifi allows to control devices from a controller or touch panel over an wireless network. Using this unit the number of control ports can be cost-effectively expanded. Additionally it simplifies control of equipment located at an extended distances from a controller.

Specifications

Control ports

- 1x Bi-directional serial RS-232
Baud rate from 300 to 460 800 bps
5-pin connector
- 1x Bi-directional serial RS-232/422/485
Baud rate from 300 to 460 800 bps
5-pin connector
- 4x Digital I/O
5-pin connector with common ground

LED indicators

Power, WLAN activity, Control ports

Button

Set factory default

Software technologies

Integrated web server for setup

Main Features

- Wireless network, IEEE 802.11b/g Wi-Fi 2.4 GHz
- Control ports - bi-directional serial and digital I/O
- Power supply 12 to 24 VDC
- Front panel indicators for each control port
- Web server and Admin Web pages for setup
- Fully compatible with CUE's mobile solution, touch panels and controllers
- Fully compatible with Cue Visual Composer software
- Unified aluminium enclosure

Applications

- Commercial single-room applications
- Commercial huge multi-room and multi-floor distributed systems
- Home theater applications
- Complete residential home automation

Communication

Wireless network, IEEE 802.11b/g Wi-Fi 2.4 GHz

Power supply

12 to 24 VDC, max. 3 W
Power jack connector


Physical

Aluminium enclosure
Dimensions 105 x 43.5 x 92 mm / 4.14" x 1.7" x 3.6"
1/4 rack space, 1 U
Weight 0.3 kg / 0.7 lb


Environment conditions

Operating temperature 10° to 40° C
Storage temperature 0° to 60° C
Relative humidity 10% to 90% non-condensing

Front Panel

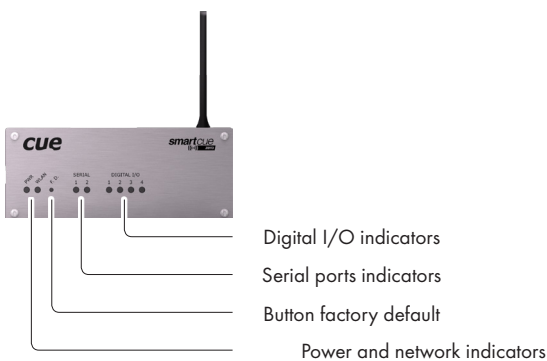

Rear Panel

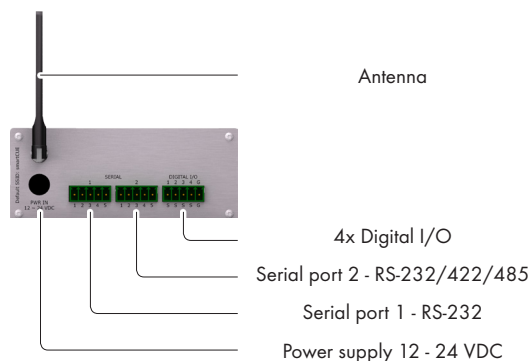

Order Information

Product code CS0423

Box Contents

- Interface smartCUE-zero-wifi
- Wi-Fi antenna
- Connector set
- Power supply
- CE Declaration, RoHS Declaration
- Data Sheet, Cue System Connector Wiring Sheet