sensorCUE-W

CS0289

Description

The case of sensorCUE-W is a small plastic box (83 x 81 mm) which allows simple installation into the standard European electrical wall box. The temperature and daylight sensors must not be covered so that the functionality of sensorCUE-W is ensured. The standard CUEwire is connected via 4-conductor cable, containing the 24 VDC power supply and RS-485 data.

Addressing

The ADDRESS of the sensorCUE-W is binary coded by DIP switch located on the rear panel.

The ADDRESS can be set in the range 1 to 127.

Default ADDRESS is 15.

sensorCUE-W front view

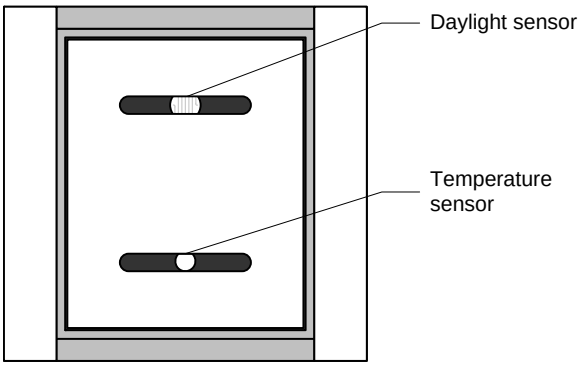

sensorCUE-W rear view

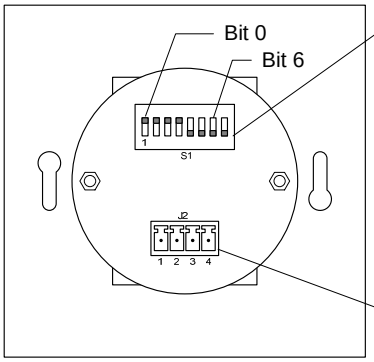

CUEwire connector

Pin	Signal	Description	Phoenix 4-pin 3.5 mm
1	+24	Power +24 VDC	
2	G	Ground	
3	A+	RS-485 Data +	
4	B-	RS-485 Data -	

Connecting

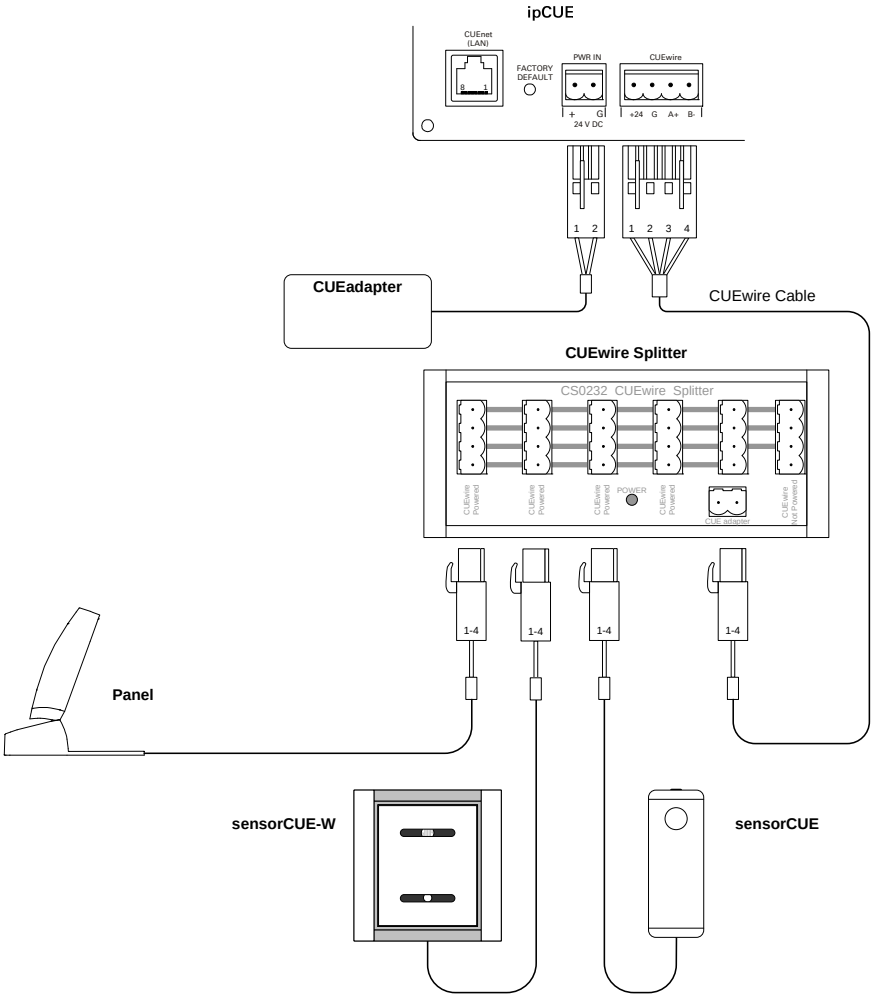

Copyright © CUE, a.s., Praha, Czech Republic 1990 - 2008.
All rights reserved. Specifications are subject to change without prior notice.