


signCUE-one

CS0550

cue

Description

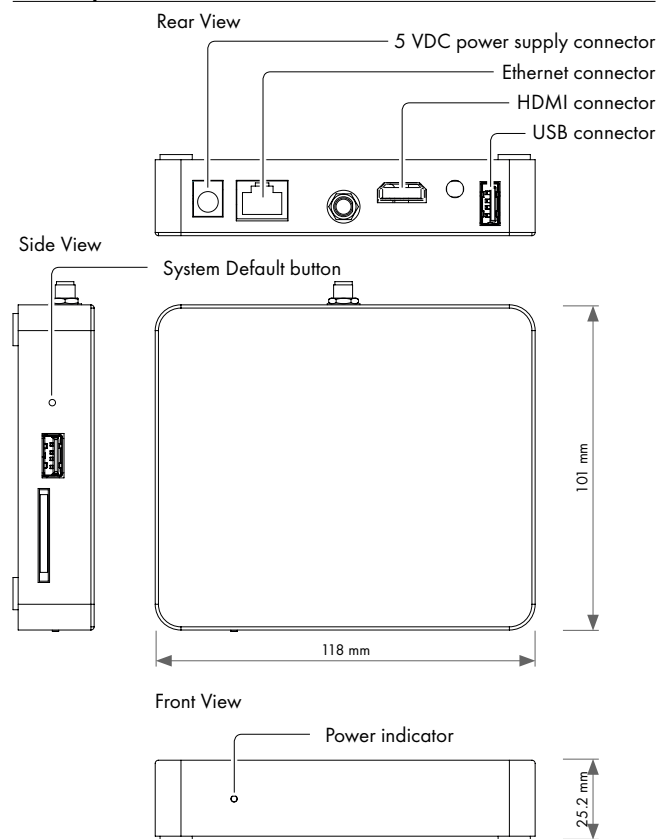


Note: connectors not described here are not used in the signCUE-one unit.

Box Contents

signCUE-one unit
Power supply 5V/3A incl. power cable
Ethernet cable
Self-adhesive velcro tapes
Data Sheet
Declaration of Conformity
Warranty Conditions

Connection

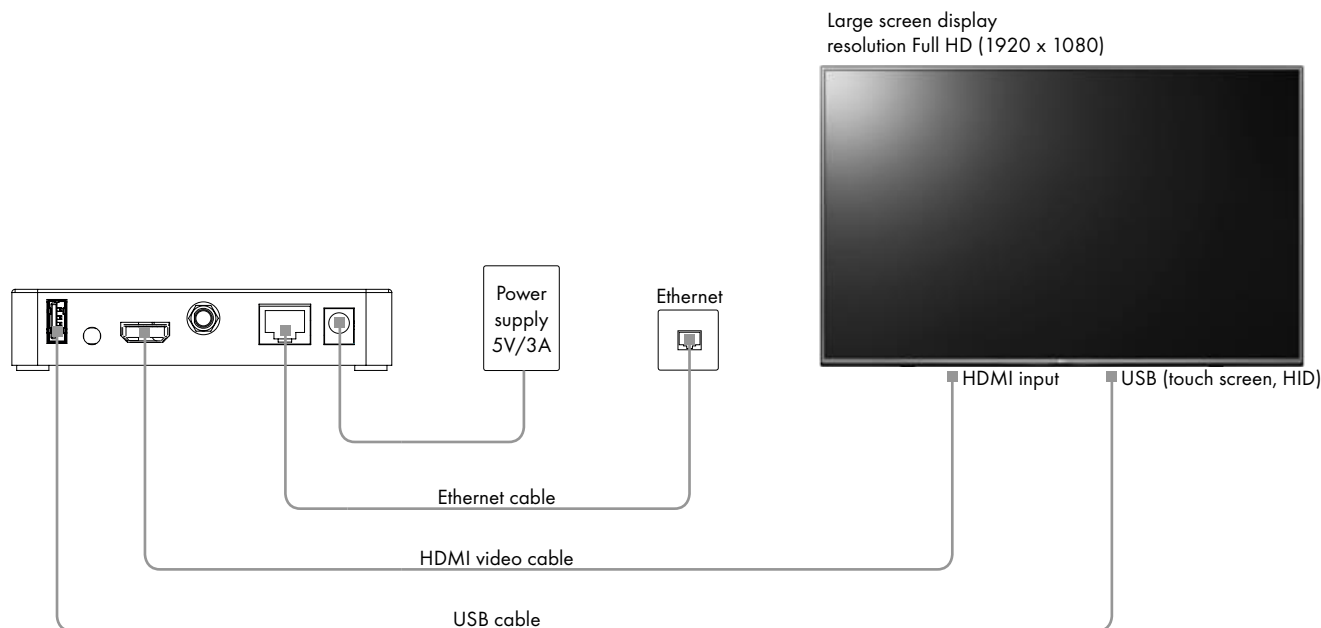

System Default Setup

When the System Default button is pressed longer than 5 sec., the system default function is performed and setup is as follows:

- IP address: from DHCP (192.168.1.128 without DHCP)
- IP Mask: from DHCP (255.255.255.0 without DHCP)
- Password: Empty (no input required)

Installation

You can use delivered self-adhesive velcro tapes to attach the signCUE-one to the selected place. Apply these tapes to the bottom side of the unit. Avoid using the unit near water, in direct sunlight, or near a heating device. Free space 1 cm or more must be left around the unit to enable free air flow to cool the unit.