

# touchCUE-5

Wired Tabletop Touch Panel 4.3"



## Main Features

- Edge-to-edge front glass
- Slim aluminium unibody enclosure
- Integrated tabletop stand
- 4.3" IPS touch screen display with wide viewing angles
- Resolution 800 x 480 pixels
- Pixel density 217 ppi
- Display colors 32-bit (True Color)
- Projected capacitive touch overlay
- Video preview
- Single cable Ethernet connection
- Power over Ethernet power supply
- Built-in microphone, speakers, light and proximity sensors

## Description

The touchCUE-5 is wired tabletop touch panel offering clean modern design with edge-to-edge front glass and sleek aluminium body with tabletop stand. It is ideal front-end for any tabletop applications. Fully compatible with CUE controllers and interfaces, this touch panel provides the ultimate one-touch solution for meeting rooms, conference rooms, boardrooms and high-tech homes.

The 4.3" IPS touch screen display offers resolution 800 x 480 pixels and it produces stunning true color images. Touch panel has projected capacitive touch overlay. Single cable Ethernet connection provides easy network integration. The touch panel is equipped with Power over Ethernet (PoE) technology enabling an Ethernet network cable to deliver both data and power.

## Installation


Slim and low profile design sits perfectly on a table without obstructing views. Delivered flat Ethernet cable provides sleek single cable connection and the network connector is hidden in a tabletop stand.



## Application Diagrams

The following diagram describes the use of touch panel with controller and IP interfaces. In this case the touch panel serves as graphic user interface only.

The following diagram describes the use of touch panel with IP interfaces only. This configuration allows to create cost effective distributed control solution where touch panel serves as controller and graphic user interface in one box. In Cue Visual Composer touch panels and controllers are programmed in the same way, which makes possible to use touch panels as fully functional control units.

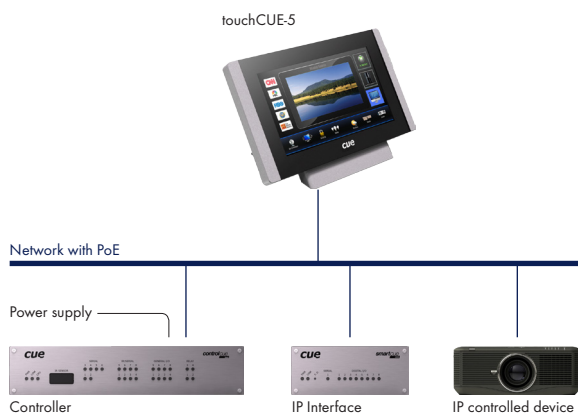

# touchCUE-5

Wired Tabletop Touch Panel 4.3"



## Specifications

### Touch-screen display

- Color IPS LCD with LED backlight
- Size 4.3" / 109 mm diagonal, wide screen
- Resolution 800 x 480 pixels (WVGA)
- Display colors 32-bit (True Color)
- Transparency 8-bit Alpha blending
- White luminance 600 cd/m<sup>2</sup>
- Response time 40 ms
- Contrast ratio 1000 : 1
- Pixel pitch 0.117 x 0.117 mm
- Pixel density 217 ppi
- Viewing angle  $\pm 80^\circ$  horizontal,  $\pm 80^\circ$  vertical
- Projected capacitive touch overlay
- Edge-to-edge glass

### Built-in sensors

- Light sensor for automatic backlight dimming
- Proximity sensor for automatic backlight switching on

### Buttons

- System Default

### Memory

- 512 MB RAM
- microSD Card min. 8 GB

### Software

- XPL<sup>2</sup> runtime for application created in Cue Visual Composer
- Admin Web for setup

### Video

- Streaming video preview
- Formats: MJPEG, H.264

### Audio

- Built-in microphone
- Built-in speakers

### Wired communication

- 10/100 BaseT LAN, RJ-45 connector

### Power supply

- Power over Ethernet (PoE), IEEE 802.3af compatible



### Physical

- Sleek aluminium body, edge-to-edge front glass
- Integrated tabletop stand, fixed angle 58°
- Dimensions 136 x 81 x 73 mm / 5.4" x 3.2" x 2.9"
- Weight 0.4 kg / 0.9 lb

### Environment conditions

- Operating temperature 10° to 40° C
- Storage temperature 0° to 60° C
- Relative humidity 10% to 90% non-condensing

## Mechanical Description

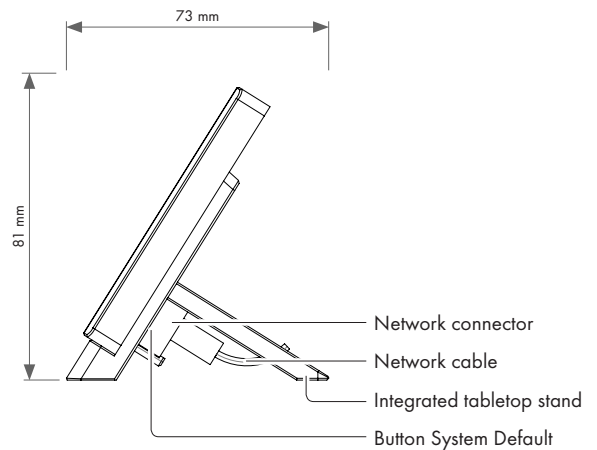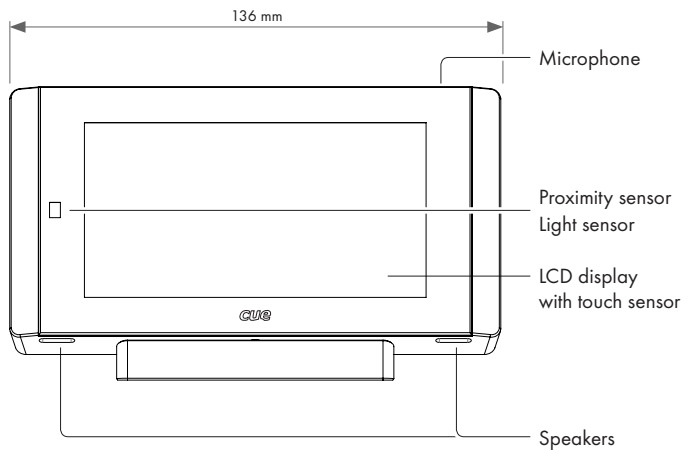

## Box Contents

- Touch panel touchCUE-5
- Power supply with PoE injector
- Flat Ethernet cable
- Cleaning tissue

- Data Sheet
- Declaration of Conformity
- Cue System Connector Wiring Sheet

## Order Information

Product code CS0371