


PEF200

CS0166-1, CS0166-2

Introduction

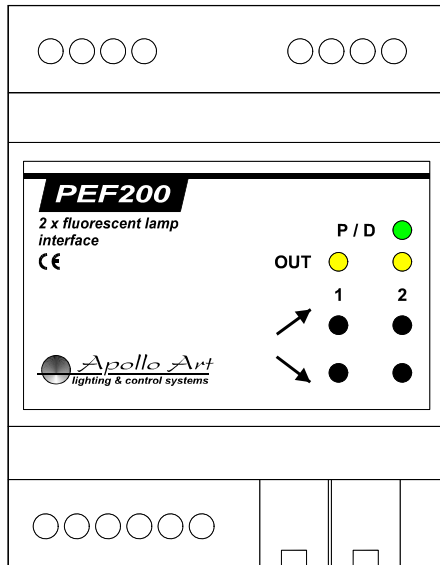

PEF200 is a two-channel interface for fluorescent lamp dimming ballasts with DSI control signal (TRIDONIC, ZUMTOBEL). The unit features PEbus and contact closure control. Programmable parameters (inputs response, min. and max. value of output voltage, scan speed). Indication of output levels by yellow OUT LEDs. Indication of power by green P/D LED. This LED is flashing while data is being transmitted or received through the PEbus.

For detail information see manuals for **Power Express** units. All manuals are stored on Application CDs.

Connecting

